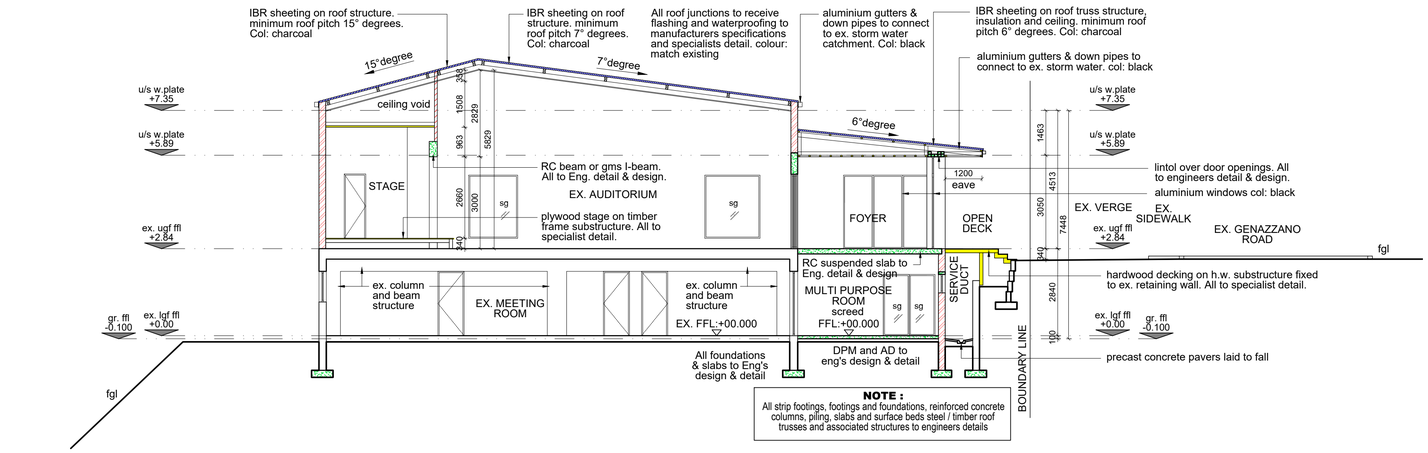

SECTION A-A
SCALE 1:100

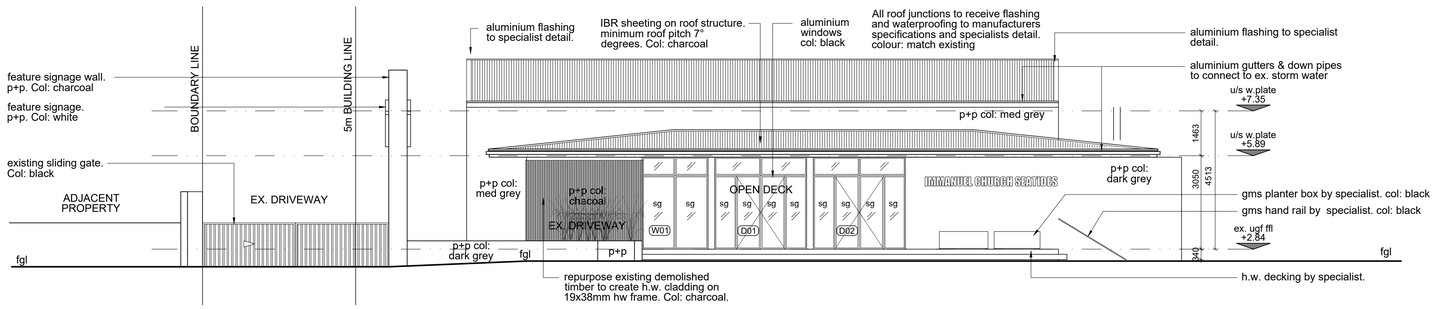

SOUTH WEST ELEVATION
SCALE 1:100

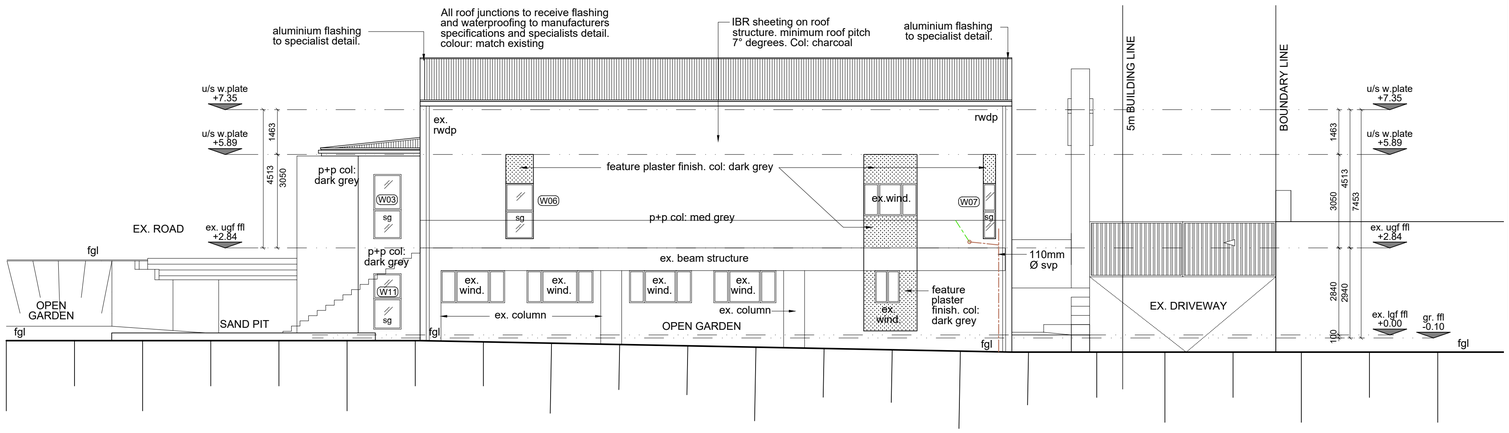

NORTH EAST ELEVATION
SCALE 1:100

GENERAL SPECIFICATIONS AND FINISHES

1.0 STRUCTURE

1.1 CONCRETE SURFACE BED WITH MESH RE-INFORCEMENT, ON DAMP PROOF MEMBRANE, ON POISONED COMPACTED SOIL. ALL TO STRUCTURAL ENGINEER'S DETAILS.

1.2 ALL REINFORCED CONCRETE SLABS, BEAMS, RC WALLS, STAIRS AND FOUNDATIONS TO STRUCTURAL ENGINEER'S DETAIL.

1.3 INTERNAL WALLS TO BE 110mm CLAY COMMON OR EQUAL AND APPROVED BRICKS. WALLS TO BE PLASTERED AND PAINTED, UNLESS INDICATED OTHERWISE. ALL TO ENGINEERS DETAIL.

1.4 EXTERNAL WALLS TO BE 220mm THICK CONSISTING OF TWO SKINS OF 110mm BRICKWORK. BRICKWORK TO BE SUITABLY TIED WITH BRICK FORCE LAID TO ENGINEERS DETAIL. EXTERNAL FACE OF INNER SKIN TO BE BAGGED AND WATERPROOFED WITH A SUITABLE BITUMEN PAINT OR EQUAL AND APPROVED. ALL TO ENGINEERS DETAIL.

1.5 ALL PLATFORMS, BANKS AND EARTHWORKS TO STRUCTURAL ENGINEERS DETAIL.

1.6 ALL TIMBER DECK STRUCTURES ON COMPACTED POISONED SOIL TO SPECIALIST DETAIL.

2.0 FINISHES (VERTICAL SURFACES)

2.1 EXTERNAL WALLS: *REFER TO PLANS & ELEVATIONS*
- PLASTER AND PAINT - COLOUR: MEDIUM GREY.TO CLIENT APPROVAL
- FEATURE TEXTURED PLASTER AND PAINT - COLOUR: DARK GREY. TO CLIENT APPROVAL
- CLADDING - REPURPOSE EXISTING DEMOLISHED TIMBER TO CREATE 19X38MM HARDWOOD CLADDING LAID VERTICALLY ON PERPEDICULAR 19X38MM HARDWOOD BATTEN BELOW. COLOUR: CHARCOAL. TO SPECIALIST DETAIL.

2.2 INTERNAL WALLS: *REFER TO PLANS & ELEVATIONS*
- SMOOTH PLASTER TWO COATS PAINT. COL: WHITE. FEATURE WALL COL: CHARCOAL. TO CLIENT SPECIFICATION.
- CLADDING - REPURPOSE EXISTING DEMOLISHED TIMBER TO CREATE 19X19MM HARDWOOD CLADDING LAID VERTICALLY ON PERPEDICULAR 19X38MM HARDWOOD BATTEN BELOW. COLOUR: CHARCOAL. TO SPECIALIST DETAIL.

3.0 FINISHES (HORIZONTAL SURFACES)

3.1 CARPET - BY SPECIALIST. TO CLIENT APPROVAL.
3.2 TILE - SPECIALIST SCREED EARTHCOTE OR SIMILAR APPROVED TO MATCH EXISTING HOUSE SPECIALIST SCREED.
3.3 PINE HARDWOOD DECKING WITH 5MM SPACING FIXED WITH STAINLESS STEEL SCREWS (TWO PER END) ON SUITABLE H.W. PINE SUBSTRUCTURE. ALL TIMBER TO BE H3 TREATED. ALL TO SPECIALIST DETAIL. COMPACTED POISONED SOIL BY SPECIALIST.

4.0 WINDOWS / DOORS / GLAZING

4.1 ALUMINIUM FRAMED DOORS, WINDOWS AND GLAZING AS PER WINDOW SCHEDULE AND TO COMPLY WITH AAMSA AND SAGGA REGULATIONS.
4.2 TIMBER INTERNAL DOORS AS PER SCHEDULE.

5.0 GATES / SCREENS / PERGOLAS

5.1 EX. COVERED WALKWAY / EX. STAIR 1: 110(W)x85(H)x2200(H)MM BRICK PIERS AT 85MM SPACING. PIERS TO BE SUITABLY TIED TOGETHER USING PRECAST COPING LAID AS TIE ELEMENT ACROSS SCREEN WALL LENGTH. PLASTER AND PAINT. COLOUR: WHITE.
5.2 COVERED WALKWAY / EX. STAIR 1: GATE (900mm SIDE HUNG) - 2200MM (H) 114(W)x 75MM(D) HARDWOOD SLATS AT 85MM SPACING ON HARDWOOD FRAME STRUCTURE. COLOUR: WHITE TIMBER. ALL BY SPECIALIST.

6.0 ROOF / CEILING / RAINWATER GOODS

6.1 PITCH : 15° & 7°. IBR ZINCALUME COLORPLUS ROOF SHEETING, ON ALUMINUM FOIL SISOLATION LAID BELOW SHEETING, OVER 100X100MM GMS PURLINS LAID PERPENDICULAR TO H3 TREATED 250X100MM LAMINATED RAFTERS AND RIDGE BEAM, WITH 50MM ISOTHERM INSULATION LAID BETWEEN RAFTERS ON MILD STEEL BRANDERING LAID BETWEEN RAFTERS. ALL INSULATION TO COMPLY WITH RELEVANT R-VALUES. SHEETING COLOUR: MATCH EXISTING. ALL TIMBER TO BE H3 TREATED OR SUITABLE ALTERNATIVE ALL TO ENGINEERS DESIGN AND DETAIL.

6.1 PITCH : 6°. IBR ZINCALUME COLORPLUS ROOF SHEETING, ON ALUMINUM SISOLATION LAID BELOW ROOF SHEETING, OVER 50X38MM PURLINS LAID PERPENDICULAR TO 152X50MM TRUSS. 100MM ISOTHERM OR SIMILAR LAID OVER 50X50MM CEILING BATTENS FIXED TO TRUSS TIE BEAM SOFFIT WITH FULLY SKIMMED GYPSUM CEILING BOARD. ALL TIMBER TO BE H3 TREATED SAP. ALL INSULATION TO COMPLY WITH RELEVANT R-VALUES AND ENERGY EFFICIENCY CONSULTANT RATIONAL DESIGN. SHEETING COLOUR: CHARCOAL. ALL TO ENGINEERS AND SPECIALIST DESIGN AND DETAIL.

6.3 FULLY SKIMMED FLUSH 9,5mm GYPSUM PLASTERBOARD CEILING FIXED TO H3 TREATED TIMBER BRANDERING. ALL INSTALLED TO MANUFACTURER'S SPECIFICATIONS.

6.4 125MM SEAMLESS ALUMINIUM GUTTER FIXED TO NUTEC FACIA. GUTTER AND FACIA COLOUR: MATCH ADJACENT ROOF SHEETING TO SPECIALIST DETAIL.

6.4 100MM SEAMLESS ALUMINIUM RAIN WATER DOWN PIPE TO MATCH ADJACENT WALL COLOUR.

6.5 L-PROFILED ALUMINIUM BARGE BOARD TO SPECIALIST DETAIL. COLOUR: MATCH ROOF ROOF.

7.0 SEWER AND STORMWATER

7.1 ALL STORM WATER CHANNELS, CATCH PITS, DRAINS AND PIPING TO ENGINEERS DETAIL.

8.0 ALL PLUMBING WORKS

8.1 SEWER SYSTEM: ACCESS PANELS TO BE PROVIDED TO ALL DRAINAGE DUCTS TO COMPLY WITH PART 20.2 OF SABS 0400-1990. 110MM PVC SOIL PIPE TO MIN. FALL OF 1:60 TO EXISTING SEWER SYSTEM. ALL TO ENGINEERS DESIGN AND DETAIL.

8.0 ENERGY EFFICIENCY TO BE CONFIRMED

ENSURE COMPLIANCE WITH SANS10400 PART XA.ED2 REGULATION AND THE ENERGY CONSULTANT REPORT .

8.1 GLAZING: - TBC
- W02 - DOUBLE GLAZING U VALUE: 3.2W/m^2 AND SHADING COEFFICIENT: 0.45
8.2 LIGHTS ARE 4W/M² TBC
8.3 50% VOLUME OF HOT WATER IS TO BE HEATED VIA A NON-ELECTRICA RESISTANCE SYSTEM (SOLAR/GAS/HEAT PUMP). TBC
8.4 100MM AEROLITE (OR SIMILAR) IN THE SHEETED ROOF, 50MM ISOBOARD IN THE RAKED CEILING, NO INSULATION REQUIRED IN THE CONCRETE ROOF
8.5 IF AN A/C SYSTEM IS INSTALLED IT MUST HAVE A COP OF 3.5 OR BETTER. TBC

REVISIONS

REV_00_MUNICIPAL SUBMISSION DRAFT	2024.03.05_MJ

NOTES

SCHEDULE OF AREAS

PROPERTY DESCRIPTION			
ERF	: ERF6459		
TOWNSHIP	: NOTTINGHAM ROAD		
SITE AREA	: 4065m²		
SITE CONTROL MEASURES			
CONTROL	PERMISSABLE	EXISTING	PROPOSED
HEIGHT ZONE	2 STOREY'S	245.5m²	241m²
COVERAGE	30% = 1220m²	1220m²	241m²
FAR	0.4 = 1626m²	1626m²	241m²

ADDITION AND ALTERATION KEY

	EXISTING STRUCTURE
	EXISTING STRUCTURE DEMOLISHED
	NEW BRICKWORK
	NEW CONCRETE
	NEW DRYWALL
	NEW STEEL
	NEW TIMBER

narrative ARCHITECTS
7 RAYNHAM GARDENS, 28 HOWICK ROAD, TOWNHILL, PIETERMARITZBURG T_0795827749

PROJECT
PROPOSED ADDITIONS AND ALTERATIONS LOT6459 TONGAAT, SEATIDES, 172-188 GENAZANO ROAD

CLIENT
IMMANUAL CHURCH SEATIDES

AUTHOR SIGN: CLIENT SIGN:

DRAWING TITLE
SECTION A-A / ELEVATIONS
GENERAL SPECIFICATIONS AND FINISHES
AREA SCHEDULES / KEY

DATE	AUTHOR	SACAP NO.	CHECKED	SCALE
05 MARCH 2025	MJ	Pr.ARCH24750962	MJ	AS SHOWN

DRAWING NUMBER **NA_2407_400** REV **rev_00**