MASONRY REINFORCING

UNLESS OTHERWISE SHOWN ON DRAWINGS ALL MASONRY REINFORCING MESH SHALL BE IN ACCORDANCE WITH SUTHERLAND SPECIFICATION SE1 AND PROVIDED AS FOLLOWS:

POSITION	NO. OF REINF. COURSES
ABOVE FOUNDATIONS	5*
BELOW ALL OPENINGS (INCL. WINDOWS AND DOORS)	5**
ABOVE ALL OPENINGS (INCL. WINDOWS AND DOORS)	5**
POSITIONS NOT DESCRIBED ABOVE FOR THE FULL HEIGHT OF ALL WALLS	EVERY 4TH COURSE

* AN ADDITIONAL LAYER IS TO BE PROVIDED IN THE LAST COURSE
** REINFORCING TO EXTEND AT LEAST 600mm EITHER SIDE OF OPENING

METAL WALL TIES SHALL BE IN ACCORDANCE WITH SUTHERLAND SPECIFICATION SE1. UNLESS OTHERWISE SHOWN ON DRAWINGS WALL TIES ARE TO HAVE A MINIMUM EMBEDMENT DEPTH IN EACH SKIN OF CAVITY WALLS OF 50mm AND ARE TO BE PROVIDED AS FOLLOWS:

CAVITY WIDTH	NO. OF TIES PER m^2
50mm - 75mm	2.5
75mm - 150mm	3 (SEE NOTE)

NOTE:

FOR CAVITY WIDTHS OF 75mm - 150mm WALL TIES ARE TO BE VERTICAL TWIST WALL TIES, REFER DETAIL.



MASONRY WALL CHASES

CHASES WILL ONLY BE PERMITTED IN MASONRY WALLS OF SOLID UNIT CONSTRUCTION. CHASES IN HOLLOW MASONRY UNITS ARE NOT PERMITTED. PIPES AND CONDUITS IN WALLS OF HOLLOW UNIT CONSTRUCTION SHALL BE LOCATED WITHIN THE CORES OF HOLLOW MASONRY UNITS. CHASING IN ANY CONCRETE ELEMENT (INCLUDING PRESTRESSED CONCRETE LINTELS) IS NOT PERMITTED.

ALL SLEEVES, CHASES AND PENETRATIONS IN MASONRY WALLS SHALL AS FAR AS POSSIBLE BE PROVIDED DURING CONSTRUCTION OF MASONRY WALLS AND SHALL COMPLY WITH THE FOLLOWING MINIMUM REQUIREMENTS:

VERTICAL CHASES

VERTICAL CHASES MUST BE LIMITED TO HALF THE WALL HEIGHT FROM EITHER THE TOP OR BOTTOM OF THE WALL AND SHALL BE LIMITED IN DEPTH AS GIVEN IN THE SKETCH AND TABLE BELOW:

HORIZONTAL CHASES

HORIZONTAL CHASES SHALL BE LIMITED IN LENGTH AND LIMITED IN DEPTH AS GIVEN IN THE SKETCH AND TABLE BELOW:



WALL TYPE	c¹	MAX. LENGTH OF VERTICAL CHASE	c²	MAX. LENGTH OF HORIZONTAL CHASE (w¹)
	mm	-	mm	mm
110 WALL	30	HALF WALL HEIGHT	15	500
230 WALL	50	HALF WALL HEIGHT	30	1000
280 CAVITY WALL	30	HALF WALL HEIGHT	15	500

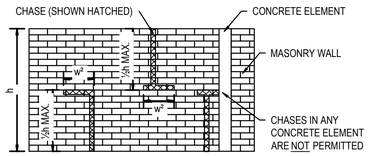

ONCE PIPES AND CONDUITS HAVE BEEN PLACED IN CHASES THEY SHALL BE SOLIDLY FILLED WITH MORTAR OF THE SAME CLASS AS THE MASONRY WALL CONSTRUCTION.

ALL PLASTER, PLASTER REINFORCING OR ANY SPECIAL DETAILS RELATING TO CHASING ARE TO BE IN ACCORDANCE WITH THE ARCHITECT.

IT REMAINS THE RESPONSIBILITY OF THE MAIN CONTRACTOR TO ENSURE SUB-CONTRACTOR COMPLIANCE WITH THIS NOTE.

ANY DEVIATION FROM THESE NOTES MUST BE APPROVED BY THE ENGINEER IN WRITING PRIOR TO THE WORK TAKING PLACE.



110 MASONRY WALL JOINT DETAIL AT RC COLUMN
1 : 15

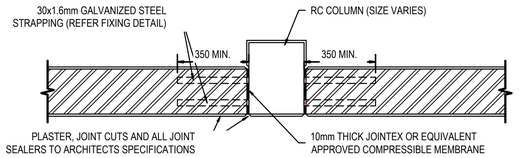

230 MASONRY WALL JOINT DETAIL AT RC COLUMN
1 : 15

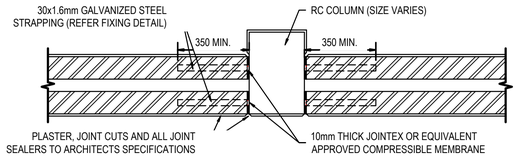

280 MASONRY CAVITY WALL JOINT DETAIL AT RC COLUMN
1 : 15

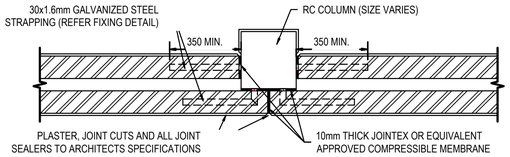

280 MASONRY CAVITY WALL JOINT DETAIL AT RC COLUMN (FACING)
1 : 15

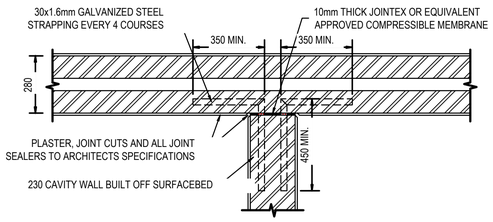

230 INTERNAL WALL AND 280 CAVITY WALL JOINT DETAIL
1 : 15

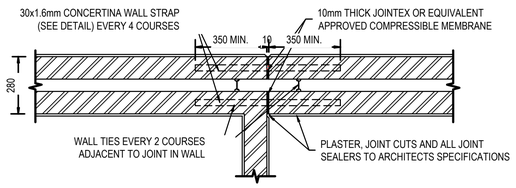

110 INTERNAL WALL AND 280 CAVITY WALL EXPANSION JOINT DETAIL
1 : 15

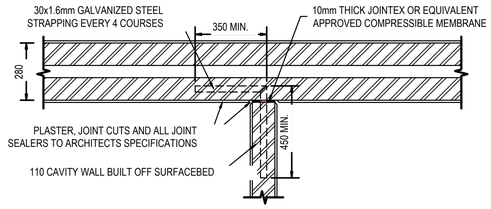

110 INTERNAL WALL AND 280 CAVITY WALL JOINT DETAIL
1 : 15



CONCERTINA WALL STRAP DETAIL
1 : 5



INFILL CAVITY WALL CAPPING DETAIL
1 : 10



WALL STIFFENER BOTTOM FIXING DETAIL
1 : 5



WALL STIFFENER SECTION DETAIL
1 : 10



WALL STIFFENER TOP FIXING DETAIL
1 : 5

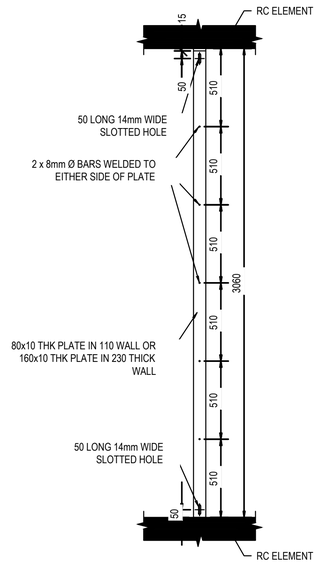

NOTE: WORKSHOP DRAWINGS OF WALL STIFFENERS TO BE SUBMITTED FOR APPROVAL PRIOR TO MANUFACTURE

WALL STIFFENER DETAIL
1 : 20

REV	REVISION DESCRIPTION	DATE
A	ISSUED FOR INFORMATION	27 JULY 25

SUTHERLAND
JHB: +27 11 268 1412
CPT: +27 21 425 0065
DBN: +27 31 566 3435
T-VALLEY: +27 21 425 0065
enquiries: info@sutherlandengineers.com

PROJECT:
IMMANUEL CHURCH SEATIDES

CLIENT:
IMMANUEL CHURCH SEATIDES

DRAWING TITLE:
TYPICAL BRICKWORK DETAILS

SCALE: AS SHOWN	DRAWN: E.P.		REVISION
DATE: 27 JULY 2025	REF:	9721_S_DW005	A
CHECKED:			

NOTE:
THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH ALL THE RELEVANT CONSULTANTS' DRAWINGS. ALL DIMENSIONS ARE TO BE READ AND NOT SCALED. ANY DISCREPANCIES ARE TO BE REPORTED TO THE PRINCIPAL AGENT IMMEDIATELY.
THESE DRAWINGS ENJOY A COPYRIGHT WHICH VESTS IN SUTHERLAND ASSOCIATES UNLESS OTHERWISE AGREED IN WRITING. THESE DRAWINGS MAY NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WHATSOEVER TO ANY PERSON WITHOUT THE WRITTEN PERMISSION OF THE COPYRIGHT HOLDER.

Plot Date: 7/19/2023 1:00:39 PM Office: DURBAN Filename: Autodesk Docs:/Toyota Wessels Institute/TOYOTA SUBSTATION - STRUCTURAL.rvt